




# Portable Site Light

## PSL-100

---

Deployable portable lighting in one  
bespoke robust package

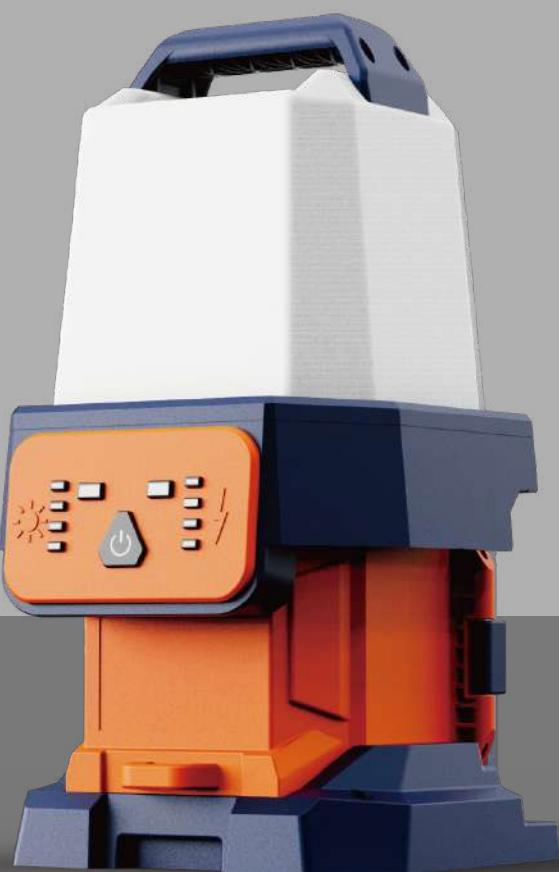




**UP TO  
6000LM**

Turbo	6,000LM
Standard	3,500LM
Balanced	2,200LM
Eco	600LM


## Application



# Ultra-long Endurance

Standard Mode Up To **8+** Hours  
(BAT-100)

*Various working modes*

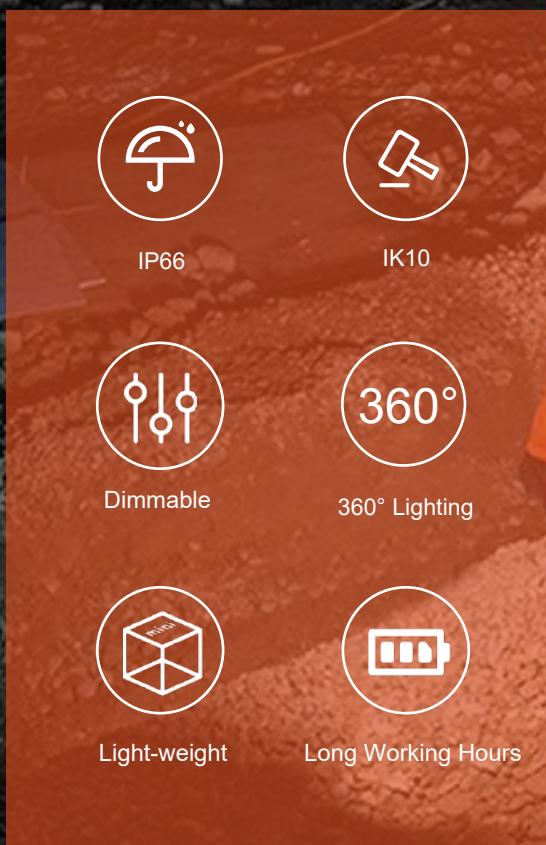



Placed on any surface or hung up to provide continuous lighting for complex environments

**2KG**

Ultra-lightweight  
carry multiple at once



360-degree lighting that can illuminate all details even in small spaces


**360°** lighting

# Specifications

## PSL-100

Weight	2.0kg (Fixture only)
Power Supply	Battery
Lumens	0 - 6,000Lm
Run Times	>8 hours (Standard mode, BAT-100)
IP Grade	IP66
Battery System	BAT Series
Working Temp.	-10°C ~ 50°C
Working Humidity	1~98%

## Size (mm)

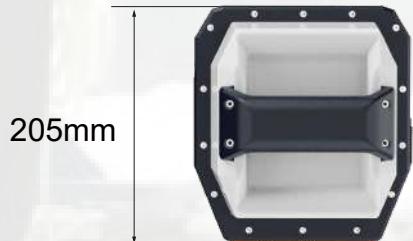

## Package

Mode	Size of Carton	Gross Weight of Carton	PCS/Carton
PSL-100	220x240x500mm	2.3KG±5%	1



CONXCORP

www.conxcorp.com  
info@conxcorp.com  
2-6350 Netherhart Rd. Mississauga, ON., L5T 1K3, Canada

**CONXCORP**  
it's all connected



# Portable Site Light

## PSL-100-B



# Personal Lighting

Precise, Multi-directional, Dimmable, Remote Controlled Lighting

*"Personalized Illumination for Your Workspace"*



## 360-DEGREE HORIZONTAL ROTATION

-----  
Rotate freely - 360 degrees horizontal direction, instantly rotate/stop with remote commands



## 180-DEGREE VERTICAL ROTATION

-----  
Rotates up to 180 degrees up and down, precisely pointing to any target position



# Anytime Anywhere

Up to 30M remote range, multiple light modes - effortless and efficient illumination



30 Meters  
Remote Range



Waterproof: IP66



Remote Control  
On/Off



Reset Button

Long press - reset light head  
to initial position

Light On/Off

Directional Control Joystick

Brightness Adjustment Button

3 levels of brightness

Mode Adjustment Button

3 lighting modes





## magnetic attachment

The base can be attached to any magnetic surface



The magnetic base allows users to flexibly choose different adhesion angles according to their specific needs. Also equipped with a safety cord.

## Attach And Work

---



# Ultra-long working hours

Standard Mode Up To

**8+** Hours (BAT-100)

Control Board



# Three Lighting Modes

Distance Mode



Midrange Mode



Close-range Mode



Battery-powered  
Up To **12,000 LM**

Battery  
(3 Modes)

Turbo 12,000LM

Standard 6,500LM

Eco 1,200LM



# Specifications

## PSL-100-B

Weight	4.4KG (Fixture only)
Power Supply	Battery
Lumens	0 - 12,000Lm
Run Times	>4 hours (Standard mode, BAT-100)
IP Grade	IP66
Battery System	BAT Series
Working Temp.	-10°C~50°C
Working Humidity	1~98%

## Size (mm)



## Package

Model	Size of Carton	Gross Weight of Carton	PCS/Carton
PSL-100-B	330x275x460mm	7KG±5%	1



CONXCORP

[www.conxcorp.com](http://www.conxcorp.com)  
[info@conxcorp.com](mailto:info@conxcorp.com)

2-6350 Netherhart Rd. Mississauga, ON., L5T 1K3, Canada

**CONXCORP**  
it's all connected